

ARTIKELNR /
ARTICLE NO.
F23110

MÄRKSTRÖM /
CURRENT RATING
100 A

SPÄNNING /
VOLTAGE
400 V

MEASURING
EQUIPMENT
CURR-
TRAFO-
SPACE | ENERGY-
METER-
SPACE

FAST ANSLUTNING /
FIXED CONNECTIONS
<125A | >125A

CEE-OUTLETS
3-POLE
16A | 32A | 63A | 125A

SCHUKO OUTLETS
16A
3

CEE-OUTLETS
4-POLE
16A | 32A | 63A | 125A

CEE-OUTLETS
5-POLE/400V
16A | 32A | 63A | 125A
1 2 1

JFB/RCD/RCBO
0,01A | 0,03A | 0,1A
3

JFB/RCD/RCBO
0,3A | 0,5A | Variable
1


VIKT/WEIGHT
15 kg

This drawing is property of El-Björn. May not be copied, shown or distributed without our written permission.

UMK 100//2121-301 EN



RITAD AV/DRAWN BY CG	DATUM/DATE 190130	NEXT SHEET 2	SHEET 1
SIGN	REVISION/ISSUE A*	RITNING NR./DRAWING F23110	

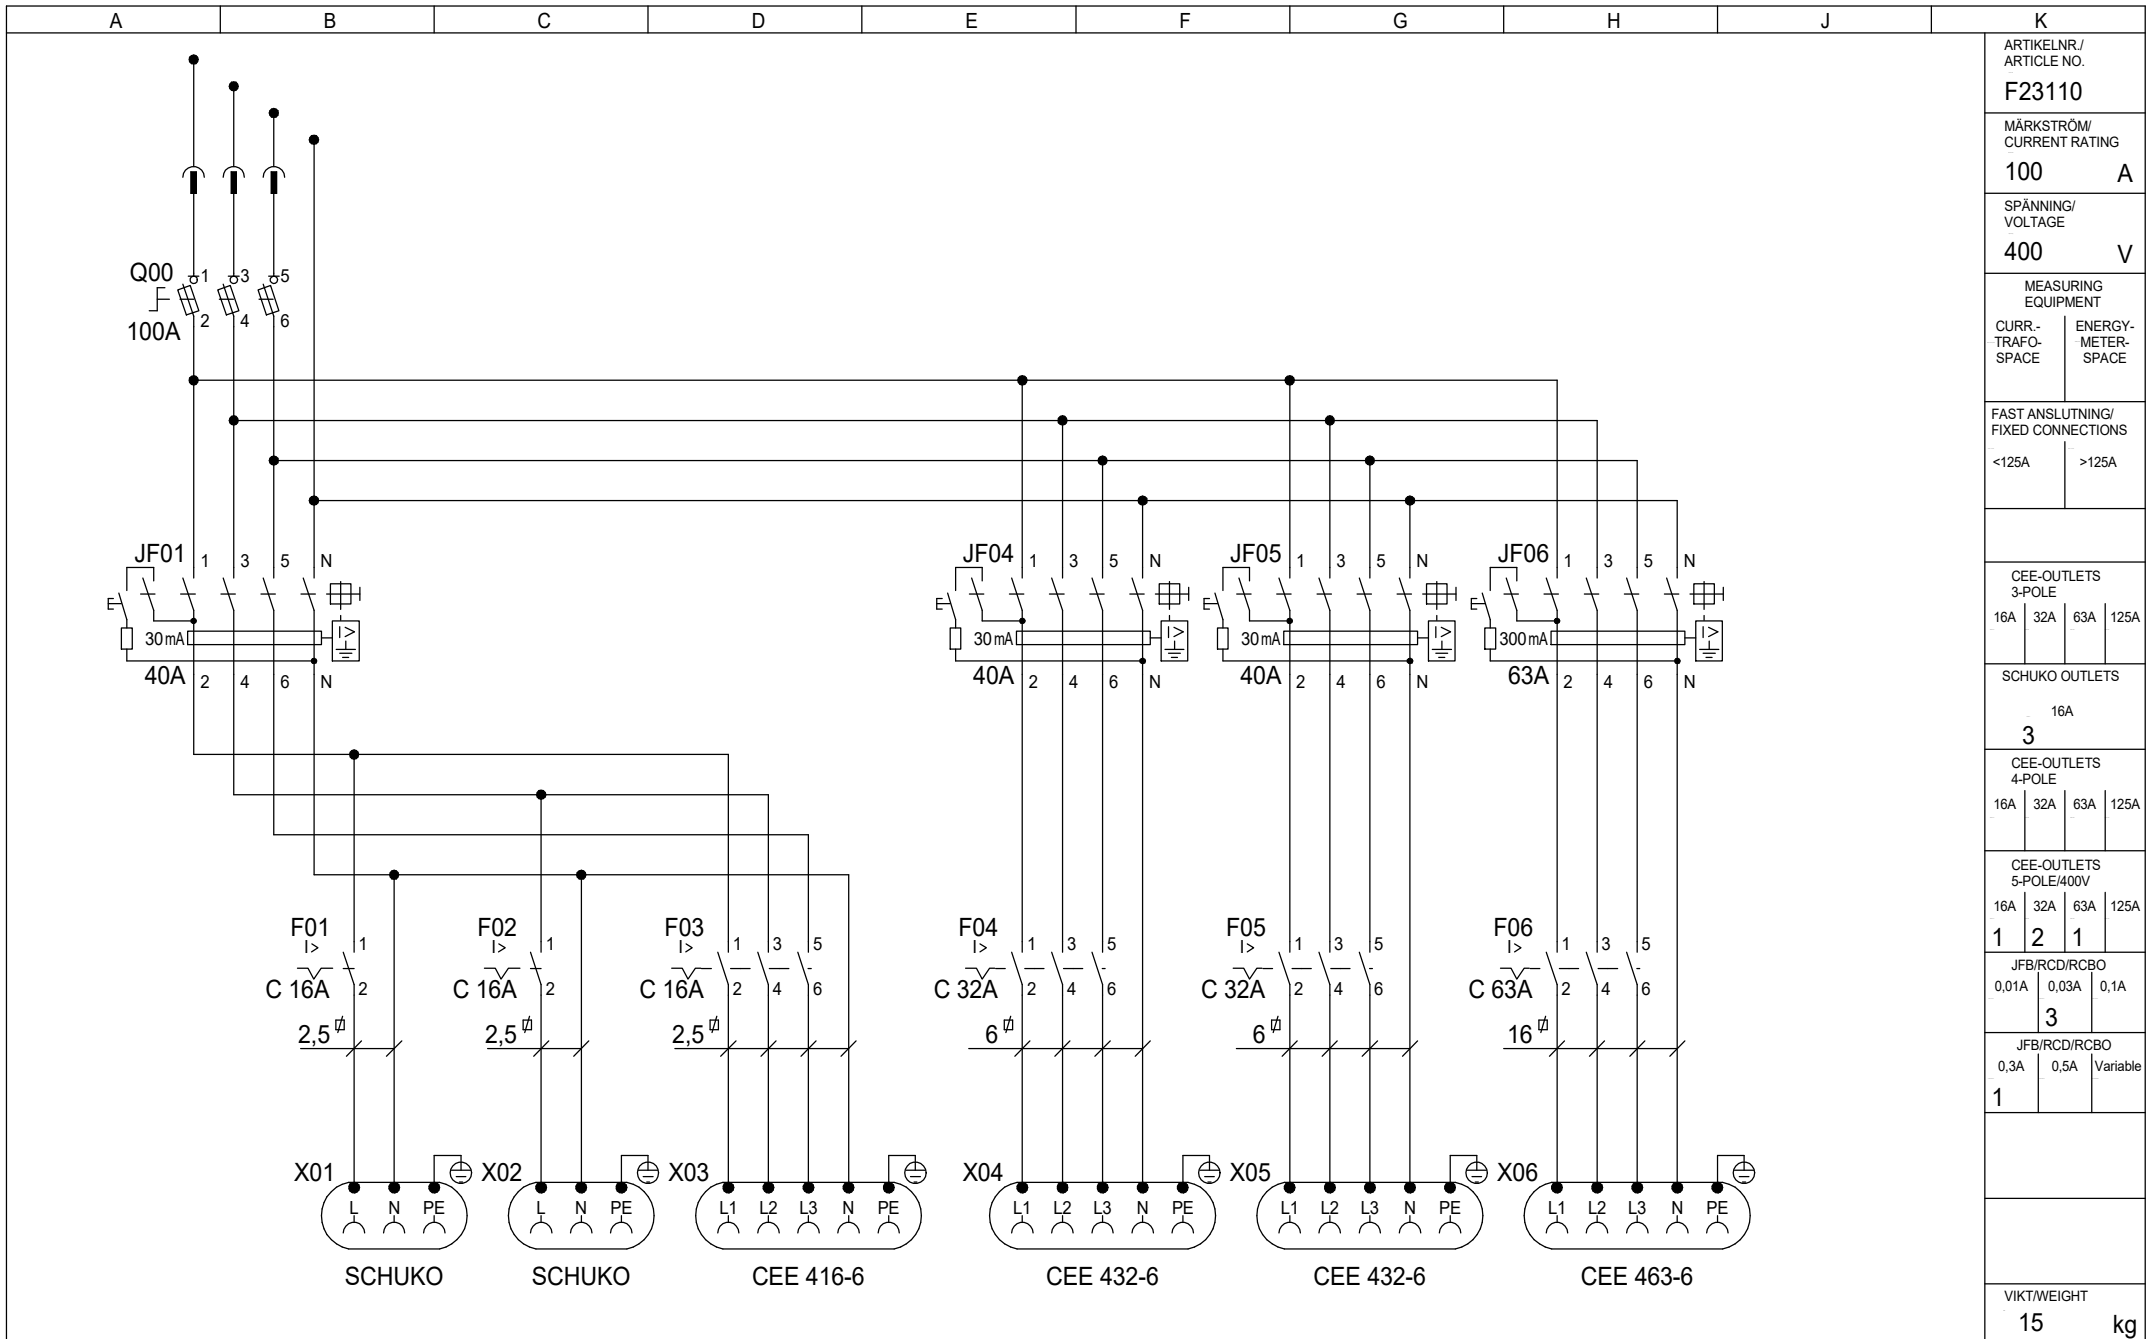

ARTIKELNR /
ARTICLE NO.
F23110

MÄRKSTRÖM /
CURRENT RATING
100 **A**

SPÄNNING /
VOLTAGE
400 **V**

MEASURING
EQUIPMENT
CURR-
TRAF0-
SPACE ENERGY-
METER-
SPACE

FAST ANSLUTNING/
FIXED CONNECTIONS
<125A >125A

CEE-OUTLETS
3-POLE
16A 32A 63A 125A

SCHUKO OUTLETS
16A
3

CEE-OUTLETS
4-POLE
16A 32A 63A 125A

CEE-OUTLETS
5-POLE/400V
16A 32A 63A 125A

JFB/RCD/RCBO
0,01A 0,03A 0,1A
3

JFB/RCD/RCBO
0,3A 0,5A Variable
1

VIKT/WEIGHT
15 **kg**

This drawing is property of El-Björn. May not be copied, shown or distributed without our written permission.

UMK 100//2121-301 EN



RITAD AV/DRAWN BY CG	DATUM/DATE 190130	NEXT SHEET 3	SHEET 2
SIGN	REVISION/ISSUE A*	RITINGS NR./DRAWING F23110	

A	B	C	D	E	F	G	H	J	K
PC.	Position	Description	Type	Manufacturer	Data	Article No.	E-number(SE)		ARTIKELNR / ARTICLE NO. F23110
1	-	Beröringsskydd	UM 3121	El-Björn		83215			MÄRKSTRÖM/ CURRENT RATING 100 A
1		Svep	UMK 3121	El-Björn		83211			SPÄNNING/ VOLTAGE 400 V
1		Uttagsplåt	UMK 3121	El-Björn		83213			MEASURING EQUIPMENT CURR- TRAFO- SPACE ENERGY- METER- SPACE
1		Direktanslutning	DS-400	ABB	400A	83531			FAST ANSLUTNING/ FIXED CONNECTIONS <125A >125A
2	F01-F02	MCB	iC60L 1P 25kA	Schneider Electric	C 16A	A9F94116	2112387		CEE-OUTLETS 3-POLE 16A 32A 63A 125A
1	F03	MCB	iC60L 3P 25kA	Schneider Electric	C 16A	A9F94316	2112394		SCHUKO OUTLETS 16A 3
2	F04-F05	MCB	iC60H 3P 10kA	Schneider Electric	C 32A	A9F07332	2112259		CEE-OUTLETS 4-POLE 16A 32A 63A 125A
1	F06	MCB	iC60H 3P 10kA	Schneider Electric	C 63A	A9F07363	2112265		CEE-OUTLETS 5-POLE/400V 16A 32A 63A 125A 1 2 1
3	JF01, JF04-JF05	RCD	iID 4P A	Schneider Electric	40A, 30mA	A9Z21440	2164955		JFB/RCD/RCBO 0,01A 0,03A 0,1A 3
1	JF06	RCD	iID 4P A	Schneider Electric	63A, 300mA	A9Z24463	2164974		JFB/RCD/RCBO 0,3A 0,5A Variable 1
1	Q00	Säkringslastfrånskiljare	00.ST8S01	M Schneider		2.031.000			VIKT/WEIGHT 15 kg
2	X01-X02	Schukouttag	35218, Typ F, Skruv	Mennekes	16A, 230V, IP54	11020EB			RITAD AV/DRAWN BY CG
1	X03	Paneluttag	416RU6	ABB	16A, 400V, IP44	416RU6	2416633		DATUM/DATE 190130
2	X04-X05	Paneluttag	432RU6	ABB	32A, 400V, IP44	432RU6	2416660		NEXT SHEET 3
1	X06	Paneluttag	463RAU6	ABB	63A, 400V, IP44	463RAU6	2416691		SHEET 3
									REVISION/ISSUE A*
									REVISIONS NR./DRAWING F23110

This drawing is property of El-Björn. May not be copied, shown or distributed without our written permission.

UMK 100//2121-301 EN



RITAD AV/DRAWN BY CG	DATUM/DATE 190130	NEXT SHEET 3	SHEET 3
SIGN	REVISION/ISSUE A*	REVISIONS NR./DRAWING F23110	